


SD-30L

气动节能液压站 PNEUMATIC ENERGY-SAVING HYDRAULIC STATION



平面结构图
PLANAR STRUCTURE DIAGRAM

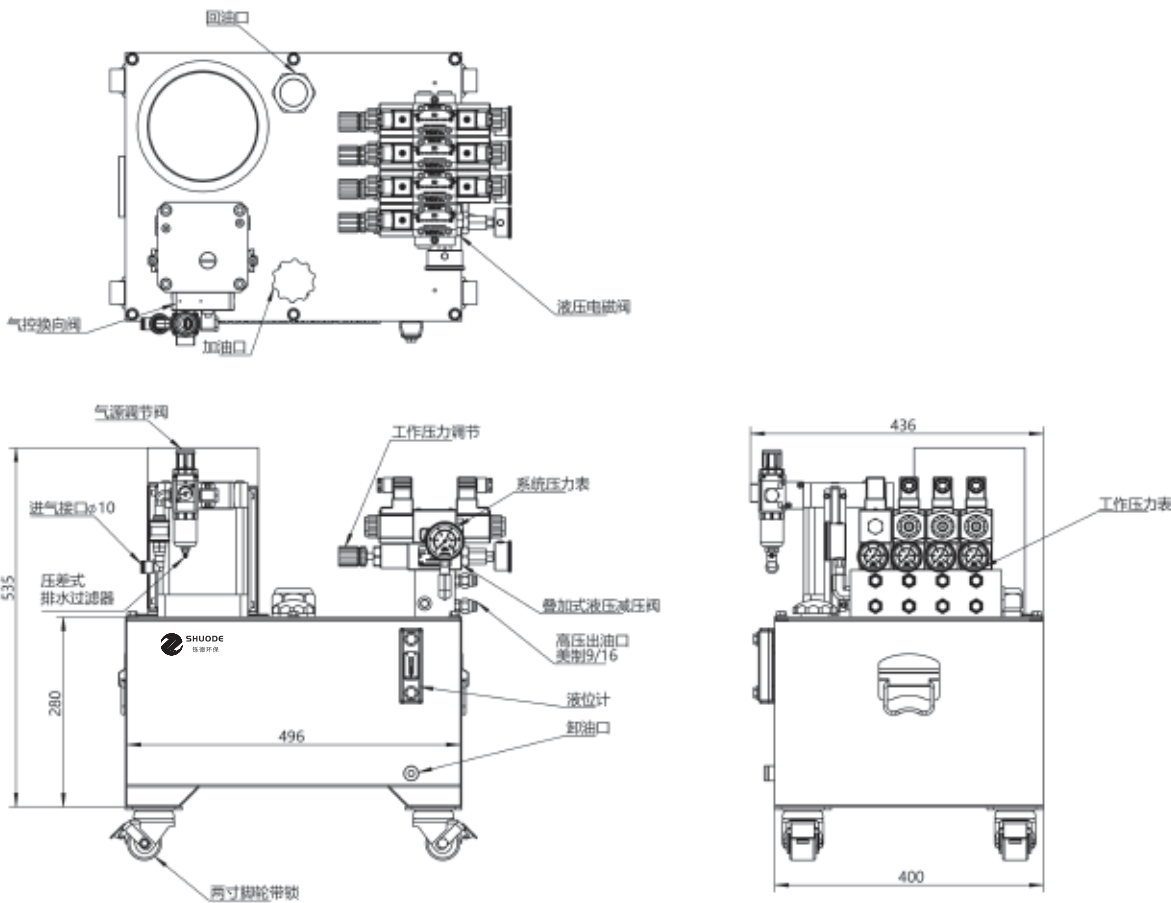

选型列表及参数
SELECTION LIST AND PARAMETERS

规格	气缸缸径 (mm)	气液比例	自由流量 (L/min)	理论出力 (kg/cm ²)						蓄能容量 (L)	油箱容量 (L)
				2bar	3bar	4bar	5bar	6bar	7bar		
SD06100D-30L	φ100	1:6.5	15	13	19.5	27	33.5	40	45.5	2.5	30
SD08100D-30L		1:8.5	12	17	25.5	34	42.5	51	60		
SD10100D-30L		1:10	10	20	30	40	50	60	70		
SD12125D-30L	φ125	1:12.7	10	26	39	52	65	78	91		
SD19125D-30L		1:16	8	32	48	64	80	96	112		
SD021150D-30L	φ150	1:21	6	42	63	84	105	126	147		

注1：可选择安装蓄能器容量 (0.63L/1L/2.5L/6.3L)
注2：可选择安装电磁阀组数量 (1组~6组)